

# Insulation / Acoustic

# INSULADD®

## Insulating & Sound Absorbing Paint Additive

### Product Information

Insuladd Paint additive is a uniquely treated fine ceramic hollow micro spheres developed in conjunction with NASA technology exchange program in 1995 to improve the effective insulation and sound dampening of the surfaces to which it has been applied. Once applied, it acts as a radiant heat and acoustic barrier that improves comfort, reduces heating and cooling requirements and dampens exterior noise up to 50%.

### Special Features

- Reduces heating and cooling cost
- Superior insulation and acoustic barrier
- Mixes with any paint
- Safe / Non-Toxic
- Energy efficient
- No lead pigments
- Improve comfort
- Dampen sound

### Uses

- Drywall
- Metal
- Exterior Walls & Roofs
- Plaster
- Interior Walls & Ceilings
- Masonry
- Wood

### Specifications

- Colors: White to light grey
- Flash Point: N/A
- Coating: VOC N/A
- Weight Solids 100%
- Estimated Coverage: 325-350 Ft<sup>2</sup>/ Gallon/ Coat
- Cleanup: Appropriate Solvents
- Thinning: With Water/ Solvents
- Estimated Dry Time: Depending upon temperature & humidity
- 2 Coats Recommended for insulation
- 3 Coats Recommended for sound Proofing.
- Each coat will increase the Sound Transmission Class (STC) of room/ partition by 2-4 dB depending on room construction
- Finish: Smooth Flat
- Method Used: T.C.C.
- Volume Solids 100%

### Surface Preparation

The entire surface area to be painted should be clean, dry, sound, and free from all dirt, grease, oils, waxes, mildew and any other surface contaminants.

### Priming

All the surface areas should be primed with a suitable primer recommended by the manufacturer prior to painting. Let it dry..

### Mixing

Slowly Mix one pound Sachet of Insuladd into one gallon of any premium quality paint


### Product Application

Apply when surface and ambient temperatures are above 55°F. and below 90°F. KEEP PRODUCT FROM

### Disclaimer

All Technical Data contained herein is correct to the best of our knowledge. All warranties are excluded, whether expressed or amplified by operation of law or otherwise, including all implied warranties of merchantability or fitness for a particular purpose, seller shall not be liable, (directly or indirectly) under any.

**FREEZING!** Apply with a quality brush, roller, or airless spray equipment.

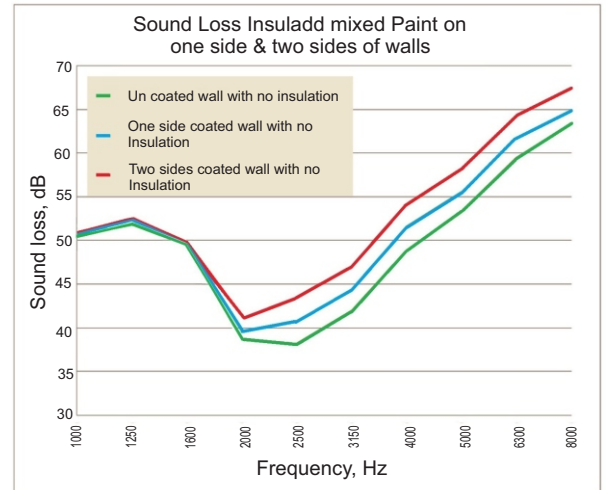

### Packaging

1 lb. , 5 lbs. Sachet and in bulk super pack

### Application Tools

Brush: Synthetic Roller: 3/8"-1/2" Nap  
Airless Spray: Minimum 2000 psi, Tip: 0.017"-0.019"

### Precautions

Keep out of reach of children! Keep away from heat, sparks & open flames. Do not take internally!

### Scan to view



Introduction How it Works Torch Test Paint Additive Energy Saving Test Reports

### Manufactured by



Insuladd Environmental Products Ltd.  
P O Box 206106, Ploom/tiano, Texas USA 75026  
[www.insuladd.com](http://www.insuladd.com), [info@insuladd.com](mailto:info@insuladd.com)  
1-214-738-1609 / 1-888-813-5065

### Sole Distributor Canada



Delta Coatings & Sealants Inc.  
2000 Argentia road, Suite # 400,  
Plaza 3 Mississauga , ON. L5N 1V9  
[info@deltacoatings.ca](mailto:info@deltacoatings.ca)  
[www.deltacoatings.ca](http://www.deltacoatings.ca)  
1-888-583-3582 / 1-647-868-3330